


# Control Cable 18AWG 4C Riser (CMR) Unshielded Stranded

## Cable Detail

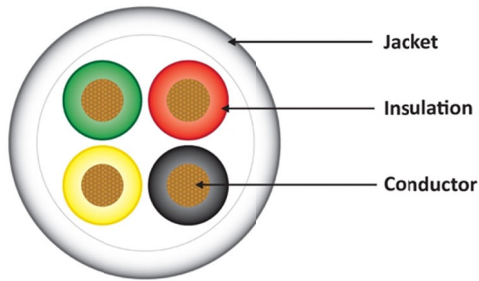

## Cable Marking

18 AWG 4C UNSHIELDED CMR FT4 TYPE XXXXXXXX C(ETL)US  
\*\*\*\*FT

Part Numbers	Jacket Color	Package
CC1804URGY4	Grey	1000ft / Reelex II

## Approval



## Applicable Standards

- CM/CMR
- CL2/CL2R

## Physical Characteristics

Conductor Material		Stranded Bare Copper
AWG		18
Conductor	(mm)	7 / 0.4
Composing	(0.400±0.01)	7*0.400
Diameter	(mm)	7*0.400
Insulation Material		PVC
Average Thickness	(mm)	0.200
Min. Point Thickness	(mm)	0.170
Insulation Diameter	(mm)	1.75±0.01
Nominal Wall	(mm)	0.245
Assembly Dia.	(±0.2mm)	3.2
Cable Core		4C
Cable-Unit		Unit 1-4
Min. Sheath Thickness	(mm)	0.35
Nom. Overall Diameter	(mm)	5.1±0.5
Jacket Material		FR-PVC
Average Thickness	(mm)	0.38
Min. Point Thickness	(mm)	0.34
Outer Dia.	(±0.2mm)	3.96
Rip Cord		Yes
Insulation colors		Black / Red / White / Green
Nominal Weight	1000 ft.	38 lbs.