


RG-6 Quad Shield BC Plenum (CMP) Coaxial Cable

Cable Detail



Approval

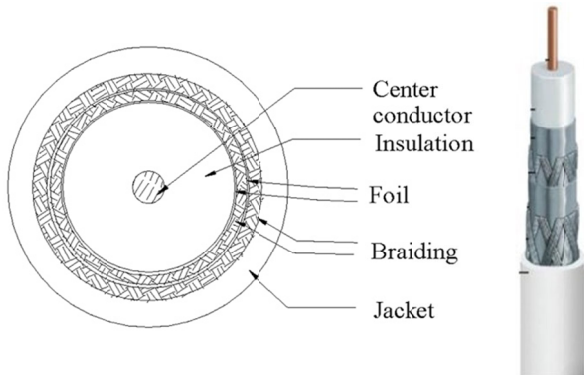

Applicable Standards

- RG-6 Quad Shield Plenum Bare Copper CATV 75 Ω Coaxial Cable
- Reference Standard NEC ARTICLE 800

Physical Characteristics

Conductor	Solid	Bare Copper
AWG		18
Diameter	(inches)	0.040
Insulation Material		Foamed FEP
Insulation Diameter	(inches)	0.170
Inner Shield Foil		Aluminum / Poly Tape
Inner Shield Braid		Aluminum
Coverage Area	(%)	60
Nom. Diameter	(inches)	0.200
Outer Shield Foil		Aluminum / Poly Tape
Outer Shield Braid		Aluminum
Coverage Area	(%)	40
Nom. Diameter	(inches)	0.228
Jacket Material		Plenum Polymer
Nominal Thickness	(inches)	0.013
Cable Diameter	(inches)	0.260
Nominal Weight	1000 ft.	36 lbs.

Electrical Characteristics

Temperature Rating	-20 to 60 (°C)
Impedance	75 (± 3.0 Ohms)
Capacitance	15.5 (pF/ft.)
Conductor DCR@20°C	6.4 (ohms/1000ft)
Velocity of Propagation	84 (%)
RoHS Compliant	Yes

Electrical Performance

Frequency (MHz)	Attenuation (dB/100FT)	Frequency (MHz)	Attenuation (dB/100FT)
1	0.40	900	7.30
10	0.92	1000	7.90
50	1.60	1200	8.40
100	2.20	1450	9.70
200	3.00	1800	11.00
400	4.33	2200	12.00
700	6.25	3000	13.80

Cable Marking

XXXXXX 18AWG CMP FT6 BC RG6/U QUAD SHIELD VERIFIED TO C(UL)US CATV SWEPT TO 3.0 GHZ ****FT

Part Numbers	Jacket Color	Package
RG6QPWH4-BC	White	1000ft / Reel II