


Fire Alarm FPLR Cable

18AWG/4C Red Solid Unshielded

Cable Detail

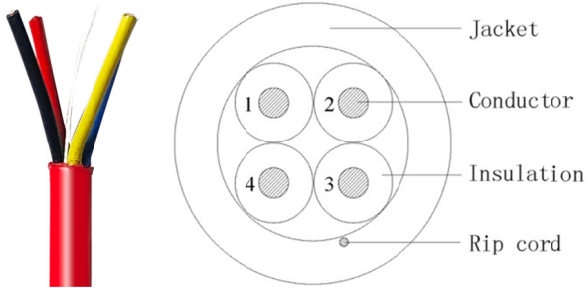

Approval



Physical Characteristics

Conductor	Solid B.C.
AWG	18
Conductor Diameter	1.02 (mm)
Insulation Material	PVC
Average Thickness	0.265 (mm)
Min. Point Thickness	0.240 (mm)
Diameter	1.55 (± 0.05 mm)
Assembly Diameter	3.80 (± 0.1 mm)
Jacket Material	PVC
Average Thickness	0.45 (mm)
Min. Point Thickness	0.40 (mm)
Diameter	4.65 (± 0.1 mm)
Rip Cord	Per request
Nominal Weight	35 (pounds)
Rated Temperature	75 (°C)

Test Object	Jacket
Test Material	PVC
Before Tensile Strength	≥ 13.8 (Mpa)
Aging Elongation	≥ 100 (%)
Aging Condition	100x168 (°Cxhrs)
Before Tensile Strength	$\geq 85\%$ of unaged (Mpa)
Aging Elongation	$\geq 50\%$ of unaged (%)
Cold Bend (-20 ± 2 °Cx4hrs)	No Crack

Colors

- Insulation Color
1.Black / 2.Red / 3.Yellow / 4.Blue
- Jacket Color
Red

Part Number

FC1804URD2

Package

1000FT / REEL

Cable Marking

EXXXXX 18AWG 4/C UNSHIELDED (UL) FPLR
DEVICE/ZONE A B C D E F 1 2 3 4 5 6 7 8 RoHS ****FT

Mechanical Characteristics